


E Series Hold and Drive Fixtured

STANLEY

Hold and Drive Fixtured Tools (22 to 380 Nm)

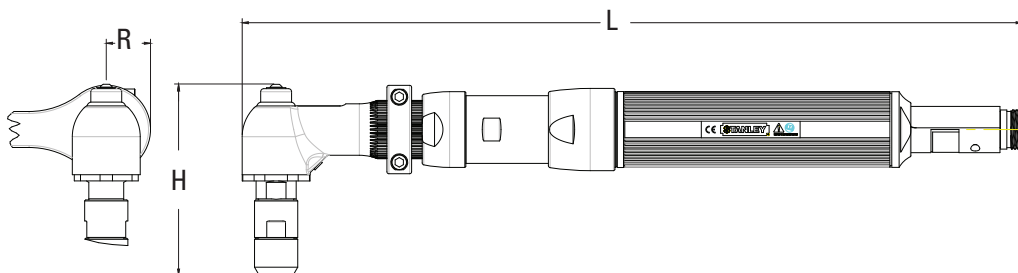


	Rated Speed	Torque		"R" Side to Center		"H" Head Height		"L" Length		Weight		Travel
Model	RPM	Nm	lb ft	mm	in	mm	in	mm	in	kg	lb	Standard
E44MH22V1-110	300	110	81	22	0.88	118	4.65	361	14.2	3.4	7.5	1"
E45MH26V2-143	330	143	105	26	1.02	114	4.62	582	22.9	4.8	10.6	2"
E55MH26V2-210	385	210	155	26	1.02	114	4.62	632	24.9	5.4	11.9	
E55MH32V2-320	250	320	236	32	1.25	180	7.1	639	25.1	6.2	13.6	
E55MH32V2-380	200	380	280	32	1.25	180	7.1	639	25.1	6.2	13.6	


Hold & Drive Options

A Tang holds the bolt while the nut is tightened

Typical Tang Options

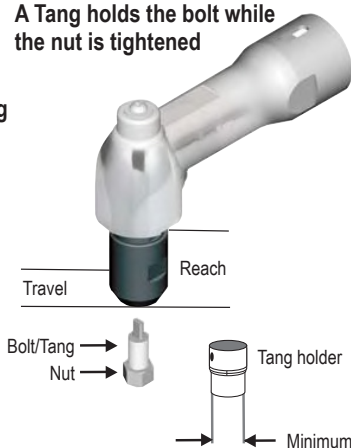

A Bit holds the bolt while the nut is tightened

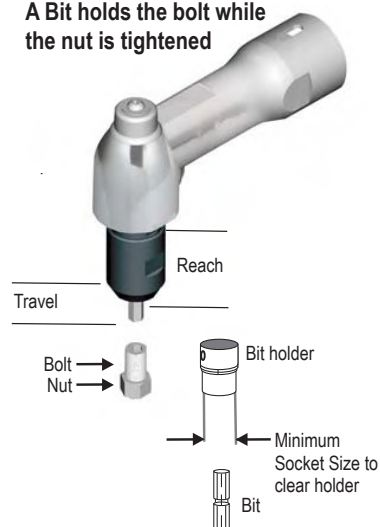

Typical Bit Options



Hold and Drive Options

H22 Output	Part No.
Socket Options*	~N4617
1" Travel Tang Holder Output	20D103211
1" Travel Bit Holder Output	20D103212
2" Travel Tang Holder Output	20D103213
2" Travel Bit Holder Output	20D103214
H22 Tang Holder	Part No.
Female Tang Holder Options	~F4287
H22 Bit Holder	Part No.
Bit Holder Options *	~F4288
H22 Reaction Bar	Part No.
Reaction Bar Assembly	20K100000
Mounting Flange Assembly	20K100300
Base Mount Bracket Assembly	20K100500
H26 Output	Part No.
Socket Options *	~F4285
1" Travel Tang Holder Output	20D103601
1" Travel Bit Holder Output	20D103602
2" Travel Tang Holder Output	20D103603
2" Travel Bit Holder Output	20D103604
H26 Tang Holder	Part No.
Female Tang Holder Options *	~H4948
H26 Bit Holder	Part No.
Bit Holder Options *	~H4947
H26 Reaction Bar	Part No.
Reaction Bar Assembly	20K100200
Mounting Flange Assembly	20K100700
Base Mount Bracket Assembly	20K100600
Reaction Bar Assembly, HD	20K100202
H32 Output	Part No.
Socket Options *	~A5302
2" Travel Tang Holder Output	20D103703
2" Travel Bit Holder Output	20D103704
H32 Tang Holder	Part No.
Female Tang Holder Options*	20D900601
H32 Bit Holder	Part No.
Bit Holder Options *	20D900602
H32 Reaction Bar	Part No.
Reaction Bar Assembly	20K100200
Mounting Flange Assembly	20K100700
Base Mount Bracket Assembly	20K100600
Reaction Bar Assembly, HD	20K100202

* Socket, Bit and Tang selections start on page 165