

E-LIT Series - Optimize your performance









Clutch Battery Tool range



desoutter.info/E-LIT

FOCUS



3 MODELS TO CHOOSE FROM	 BRUSHLESS MOTOR	 LI-ION BATTERY	 E-LIT CONFIG SOFTWARE	 SPEED MODULE	 E-LIT BOX
E-LIT PLUS ELECTRONIC BRUSHLESS (ELB) PISTOL AND ANGLE 	✓	✓	✓		
E-LIT PREMIUM ELECTRONIC BRUSHLESS SPEED CONTROL (ELS) PISTOL AND ANGLE 	✓	✓	✓	✓	
E-LIT WIRELESS COMMUNICATION WITH E-LIT BOX (ELC) PISTOL AND ANGLE 	✓	✓	✓	✓	✓

Tool management device

Speed setting / For ELS and ELC models


Two speed setting easily controlled by external module



Everything needed to optimize your assembly process

Guarantee quality and keep high productivity


- Decrease final speed to ensure tightening quality
- Avoid quality defects in your final product
- Decrease starting speed to facilitate bolt engagement

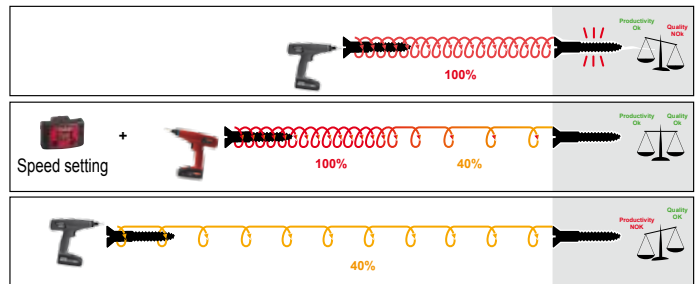

E-LIT CONFIG software

Manage your E-LIT tools


- Save your E-LIT tool setting
- Use your own tool ID
- Upload saved setting on new tools
- Go further on the setting possibility

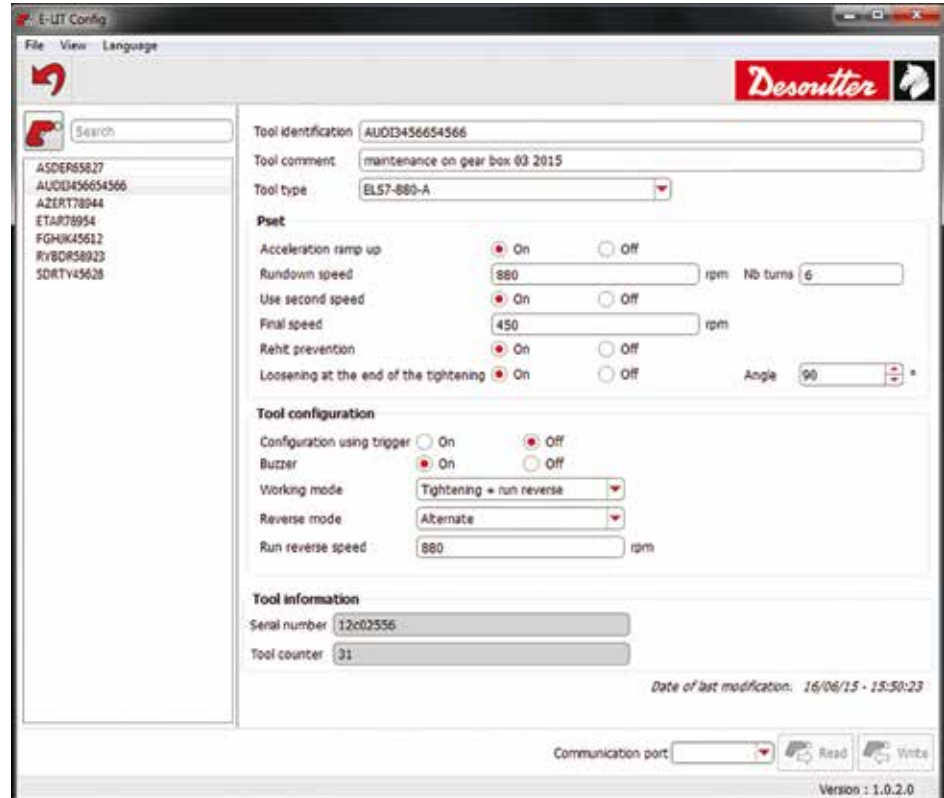

E-LIT BOX

For Poka-Yoke application

FOCUS

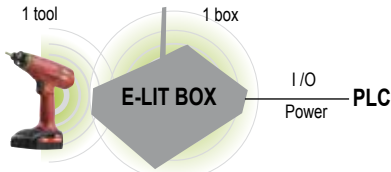

Keep the pairing if box Off



Wireless communication
IEEE 802.15.4 standard Fast
reconnection time & Low
consumption



Pairing

- Easy Pairing with dedicated button
- Keep the pairing if box Off



Poka-Yoke application

- OK/NOK Management
- Batch count : up to 4 different batch settings
- Batch count strategy
- Cross thread prevention



Connection

- Integrated power supply switch (24 V power switch)
- M12 male connector 24 V power supply and 4 digital INPUTS
- M12 female connector 8 Digital OUTPUTS
- USB port for an easy and fast connection to setting software

- 1
- 2
- 3
- 4



EASY PAIRING PROCESS

1. Press the "Easy Pairing" Button
2. Power on the E-LIT BOX



3. Press both, tool trigger and reverse, while inserting battery pack

4. Pairing completed



10 sec



NO DATA LOSS





Integrated buffer memory
up to 25 results

When wireless communication
is stopped, reports are stored
within ELC tool

You can decide to lock (or not) tool when
memory buffer is full in order to prevent
losing reports

Accessories

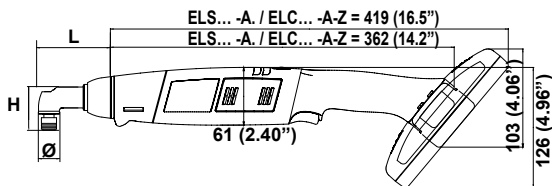

MODEL	H		L		Ø	
	mm	in	mm	in	mm	in
ELS7 / ELC7	45.5	1.79	75.7	2.98	22	0.87
ELS15 / ELC15	41.5	1.63	75.7	2.98	22	0.87
ELS30 / ELC30	45.5	1.79	134.2	5.28	28	1.10
ELS45 / ELC45	51.1	2.01	144.6	5.69	35	1.38
ELS60 / ELC60	57.1	2.25	158.5	6.24	40	1.57

OPTIONAL ACCESSORIES

ITEM		PISTOL	ANGLE HEAD 18V	ANGLE HEAD 36V	ELC TOOLS	PART NO.
Battery type						
1	Li-ion Battery 18V 2.1 Ah - 0.35 kg (0.77lb)	✓	✓		✓	615 812 099 0
2	Li-ion Battery 18V 4.2 Ah - 0.60 kg (1.32lb)	✓	✓		✓	615 812 100 0
3	Li-ion Battery 36V 2.1 Ah - 0.60 kg (1.32lb)			✓	✓	615 811 924 0
Chargers						
4	For Li-ion Battery 18 / 36V - 100 / 240V	✓	✓	✓	✓	615 811 654 5
Protective covers - Tools						
5	For Pistol - Clear	✓			✓	615 396 870 0
5	For Pistol - Black	✓			✓	615 211 030 0
5	For Pistol - Blue	✓			✓	615 211 031 0
5	For Pistol - Red	✓			✓	615 211 032 0
5	For Pistol - Grey	✓			✓	615 211 033 0
5	For Body angle head - Black		✓	✓	✓	615 211 004 0
5	For Body angle head - Blue		✓	✓	✓	615 211 025 0
5	For Body angle head - Red		✓	✓	✓	615 211 026 0
5	For Body angle head - Grey		✓	✓	✓	615 211 027 0
6	For Angle < 15Nm - Black		✓		✓	615 397 672 0
6	For Angle 30Nm - Black			✓	✓	615 573 214 0
6	For Angle 45Nm - Black			✓	✓	615 573 215 0
6	For Angle 60Nm - Black			✓	✓	615 211 005 0
Protective covers - Battery						
7	For Battery 18V 2.1Ah - Clear	✓	✓		✓	615 396 871 0
7	For Battery 18V 2.1Ah - Black	✓	✓		✓	615 211 041 0
7	For Battery 18V 2.1Ah - Blue	✓	✓		✓	615 211 042 0
7	For Battery 18V 2.1Ah - Red	✓	✓		✓	615 211 043 0
7	For Battery 18V 2.1Ah - Grey	✓	✓		✓	615 211 044 0
7	For Battery 18V 4.2Ah / 36V 2.1Ah - Clear	✓	✓	✓	✓	615 396 872 0
7	For Battery 18V 4.2Ah / 36V 2.1Ah - Black	✓	✓	✓	✓	615 211 046 0
7	For Battery 18V 4.2Ah / 36V 2.1Ah - Blue	✓	✓	✓	✓	615 211 047 0
7	For Battery 18V 4.2Ah / 36V 2.1Ah - Red	✓	✓	✓	✓	615 211 048 0
7	For Battery 18V 4.2Ah / 36V 2.1Ah - Grey	✓	✓	✓	✓	615 211 049 0
Miscellaneous						
	• Kit Overmould Presto (x10 pcs)					615 211 057 5
8	Speed Setting Module (ELS/ELC version)	✓	✓	✓	✓	615 396 829 0
9	Pistol tool holster	✓			✓	615 804 914 0
10	Side handle - Pistol	✓			✓	615 396 757 0
11	Suspension bail - Pistol	✓			✓	443 703
12	Kit colour rings - Pistol (7 colors: white, yellow, orange, green, blue, purple, grey)	✓			✓	615 396 742 5
12	Kit colour rings - Angle tools (8 colors: white, yellow, orange, green, blue, purple, grey, black)		✓	✓	✓	615 970 114 5
13	Kit Nose Crowfoot	✓			✓	615 810 695 0
14	E-LIT BOX-V2				✓	615 936 310 0
15	Power supply E-LIT BOX				✓	615 927 053 0
16	eDOCK	✓	✓	✓	✓	615 811 976 0
	• E-LIT CONFIG software	✓	✓	✓	✓	-
Desoutter Tool Holsters						
17	DTH-42	✓			✓	107892
18	DTH-90	✓			✓	615 812 119 0
19	DTH TWIN (single) without rail		✓	✓	✓	615 811 411 0
20	DTH TWIN rail kit with 2 Twin holders		✓	✓	✓	615 811 412 5
21	DTH TWIN stand kit with 2 Twin holders		✓	✓	✓	615 811 413 5
	• License Elit PC Level 1				✓	615 927 685 0



E-LIT series

0.4 to 60 Nm (3.5 to 530 in. lb) - 50 to 1550 rpm



A



B



C



D

PIC REF	MODEL	PART NUMBER	TORQUE RANGE		ROTATIONAL SPEED	OUTPUT DRIVE	WEIGHT WITHOUT BATTERY		VOLTAGE
			Nm	in. lb			kg	lb	

E-LIT PLUS - ELECTRONIC BRUSHLESS MOTOR

A	ELB 2.5-1250-P	615 165 415 0	0.4-2.5	3.5-22	1250	Hex. 1/4 F	0.8	1.76	18
A	ELB 6-900-P	615 165 416 0	0.8-6	7.1-53	900	Hex. 1/4 F	0.8	1.76	18
A	ELB 6-670-P	615 165 440 0	0.8-6	7.1-53	670	Hex. 1/4 F	0.8	1.76	18
A	ELB 8-670-P	615 165 417 0	1.5-8	13.3-70	670	Hex. 1/4 F	0.8	1.76	18
A	ELB 12-600-P	615 165 418 0	3-12	26.5-106	570	Hex. 1/4 F	0.8	1.76	18

E-LIT PREMIUM - ELECTRONIC BRUSHLESS SPEED SETTING

A	ELS 2.5-1550-P	615 165 419 0	0.4-2.5	3.5-22	500-1550	Hex. 1/4 F	0.8	1.76	18
A	ELS 6-1000-P	615 165 420 0	0.8-6	7.1-53	300-1000	Hex. 1/4 F	0.8	1.76	18
A	ELS 8-400-P	615 165 605 0	1.5-8	13.3-70	120-400	Hex. 1/4 F	0.8	1.76	18
A	ELS 8-800-P	615 165 421 0	1.5-8	13.3-70	300-765	Hex. 1/4 F	0.8	1.76	18
A	ELS 8-400-P4S	615 165 825 0	1.5-8	13.3-70	120-400	Sq. 1/4	0.8	1.76	18
A	ELS 12-600-P	615 165 422 0	3-12	26.5-106	250-570	Hex. 1/4 F	0.8	1.76	18
A	ELS 12-400-P4S	615 165 826 0	3-12	26.5-106	120-400	Sq. 1/4	0.8	1.76	18
B	ELS 7-360-A4S	615 165 725 0	1.5-7	13.3-62	120-360	Sq. 1/4	1.2	2.6	18
B	ELS 7-880-A	615 165 628 0	1.5-7	13.3-62	400-880	Hex. 1/4 F	1.2	2.6	18
B	ELS 15-480-A	615 165 629 0	5-15	44.2-133	200-480	Sq. 3/8	1.2	2.6	18
B	ELS 15-480-A4S	615 165 839 0	5-15	44.2-133	200-480	Sq. 1/4	1.2	2.6	18
C	ELS 30-300-A	615 165 630 0	10-30	88.5-265	100-300	Sq. 3/8	1.5	3.3	36
C	ELS 45-180-A	615 165 631 0	20-45	177-398	50-180	Sq. 3/8	1.5	3.3	36
D	ELS 60-160-A	615 165 632 0	25-60	220-530	50-160	Sq.1/2	1.97	4.33	36

E-LIT WIRELESS - COMMUNICATION WITH E-LIT BOX

A	ELC 6-1000-P-Z	615 165 701 0	3-6	26.5-53	300-1000	Hex. 1/4 F	0.8	1.76	18
A	ELC 8-400-P-Z	615 165 702 0	3-8	26.5-70	120-400	Hex. 1/4 F	0.8	1.76	18
A	ELC 8-800-P-Z	615 165 703 0	3-8	26.5-70	300-765	Hex. 1/4 F	0.8	1.76	18
A	ELC 12-600-P-Z	615 165 704 0	3-12	26.5-106	250-570	Hex. 1/4 F	0.8	1.76	18
B	ELC 7-360-A4S-Z	615 165 726 0	3-7	26.5-62	150-360	Sq. 1/4	1.2	2.6	18
B	ELC 7-880-A-Z	615 165 707 0	3-7	26.5-62	400-880	Hex. 1/4 F	1.2	2.6	18
B	ELC 15-480-A-Z	615 165 708 0	5-15	44.2-133	200-480	Sq. 3/8	1.2	2.6	18
C	ELC 30-300-A-Z	615 165 709 0	10-30	88.5-265	100-300	Sq. 3/8	1.5	3.3	36
C	ELC 45-180-A-Z	615 165 710 0	20-45	177-398	50-180	Sq. 3/8	1.5	3.3	36
D	ELC 60-160-A-Z	615 165 711 0	25-60	220-530	50-160	Sq.1/2	1.97	4.33	36

Battery not included in standard offering