


EA/ EB/ EC Series Tool Cable Options

Choose Your Cable


Step 1: Select a tool whip for the tool model

Step 2: Select an extension for the selected whip number

Note: All Hi-Flex cables have an 8cm (3in) minimum bend radius

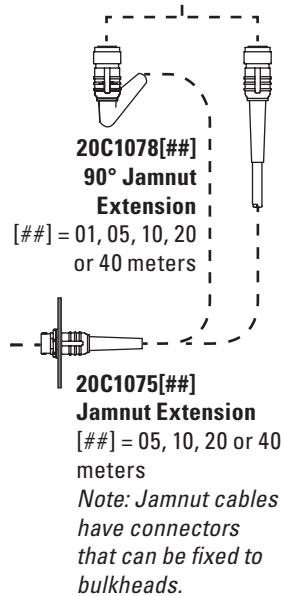


**Fits all EB02-33
Lever & Pistol and
all EA Tools**

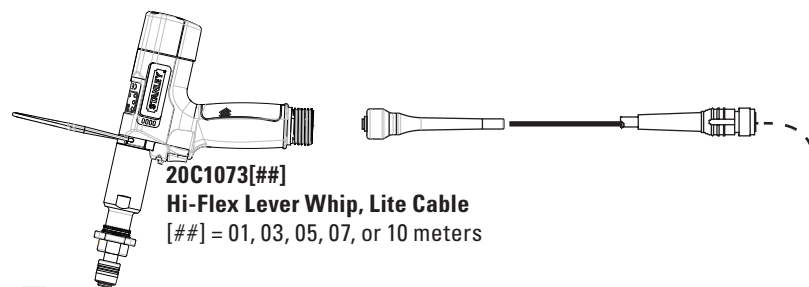


20C1073[##]
Hi-Flex Lever Whip, Lite Cable
[##] = 01, 03, 05, 07, or 10 meters

Standard Lever
Whip



20C1076[##]
Hi-Flex Lever Whip, Heavy Duty Cable
[##] = 01, 03, 05, 07, or 10 meters


**Fits all
EA/EB/EC
Lever Tools**

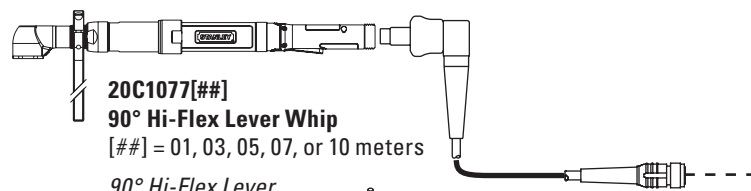


20C1077[##]
90° Hi-Flex Lever Whip
[##] = 01, 03, 05, 07, or 10 meters

90°
Lever Whip

90° Hi-Flex Lever
Whip Adjusts to
10 Positions @ 36°




90° EB Fixtured
Whip

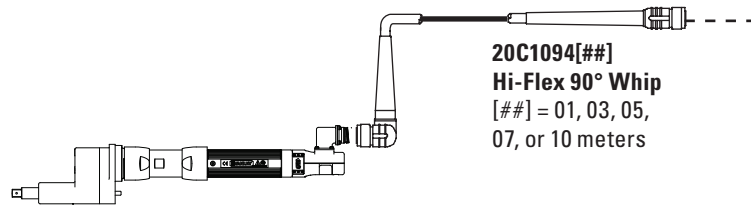

20C1094[##]
Hi-Flex 90° Whip
[##] = 01, 03, 05,
07, or 10 meters

**Fits all EB33-55
Fixtured Motors**

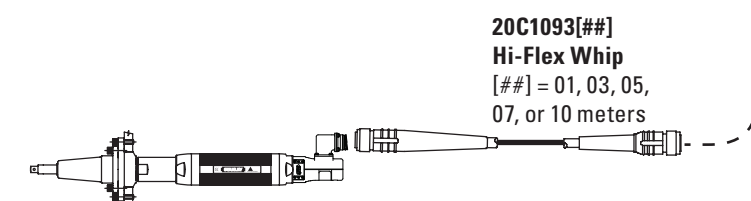

20C1093[##]
Hi-Flex Whip
[##] = 01, 03, 05,
07, or 10 meters

Standard EB Fixtured
Whip