

IRB 5500 FlexPainter

The IRB 5500 FlexPainter takes painting closer to perfection by integrating the paint application equipment. Combined with its large work area and high acceleration and painting speed, the result is the most efficient and flexible paint robot solution for basically any application.



Paint savings

Our compact and light-weight paint application components enable us to put vital paint regulation equipment, like the pumps, as close as 15 cm from the wrist. This reduces paint and solvent waste during color change significantly.

We have integrated the process equipment in the IRB 5500 FlexPainter in addition to the fully integrated process control (hardware and software). The IRC5P is controlling both the paint process and the robot motion so you can enjoy substantial savings.

Powered by IPS

The “push-out” function integrated in the IPS system is one specific feature that enables a reduction of paint even further. The basic architecture of IPS is built on combining process control and motion control as one, this simplified the system set up and enables for real savings and process perfection.

Built for painting

Standard solutions accommodate color change valves for up to 32* colors with circulation, integrated in the process arm of the robot. Also two pumps, driven by integrated servo motors, 64 pilot valves, atomizer control with dual shape air and closed loop regulation, closed loop regulation of bell speed and high voltage control – all fully integrated. Solutions for both solvent- and water-borne paint are available.

*More on special request

Less atomizers, higher flow

ABB's high flow RB1000 atomizer family is specifically designed for the high acceleration and speed of the IRB 5500 FlexPainter. This unique combination significantly reduces the number of robots needed in a spray booth and provides superior performance and high finish quality.

Modular paint components

To integrate the process into the IRB 5500 FlexPainter, ABB has developed a series of light-weight, compact and modular paint application components. This includes color change valves, 2K mixers, air- and paint regulators and pumps. All components are designed for maximum flow.



Our light and compact paint application equipment enables us to integrate 32 colors into the IRB 5500 FlexPainter and keep the speed and acceleration. To you, this means paint savings.

Paint performance example

Color loss example using 26 colors with a 6 cc pump. The measurements are "real life" including the atomizer. The IPS "push-out" function is used.

Paint loss	< 15 cc
Color change time	8 seconds

Paint robot control system

IRC5P is a modern control system, specifically designed for the paint shop. With the IPS (Integrated Process System), the user-friendly Ex certified FlexPaint Pendant and RobView 5 it is a combination of standardized functions for the paint installation and to fit specific needs. This package includes standard applications for defining User screens, Program editing and Version control, and many more. RobView 5 can also be a components in a larger Cell control HMI, like ABB FlexUI or other.

PC Tools

RobView 5	Paint cell supervision and operation (included)
ShopFloor Editor	Off-line path- and process tuning using 3D graphics
RobotStudio® Paint	Full 3D simulation and programming of the paint cell

Electrical connection

Mains voltage	200 - 600VAC, 3-phase, 50/60 Hz
Electrical safety	According to international standards

Specification

Number of axes	6 axes
Payload on wrist	13 kg
Robot mounting	Wall, floor, tilted, inverted
Ingress protection degree	IP67 (wrist IP54)
Robot unit ambient temperature	0 °C to +40 °C*
Relative humidity, non-condensing	95 % maximum
Robot footprint	500 x 680 mm
Robot unit weight	600 kg
Ex approval	Explosion protected Ex i/Ex p/ Ex c for installation in hazardous area Zone 1 & Zone 21 (Europe) and Division I, Class I & II.
Robot controller ambient temperature	+48 °C maximum
Robot controller size (H x W x D)	1450 x 725 x 710 mm
Robot controller weight	180 kg



*Recommended max ambient temp <30°

Performance

Work area	See work envelope drawings
Velocity	Max speed
Axis 1, 2 and 3	100°/s
Axis 4 - Wrist rotation	465°/s
Axis 5 - Wrist bend	350°/s
Axis 6 - Wrist flange rotation	535°/s
Wrist work envelope	±140°
Static repeatability	0.15 mm

Interface

Backup	USB connection and Ethernet
I/O boards	Analog, digital, relay, 120VAC, encoder and process I/O boards available
Fieldbus support	Interbus-S, ProfiBus, Profinet, CC Link, DeviceNet and Ethernet IP available
Network	Ethernet FTP/NFS

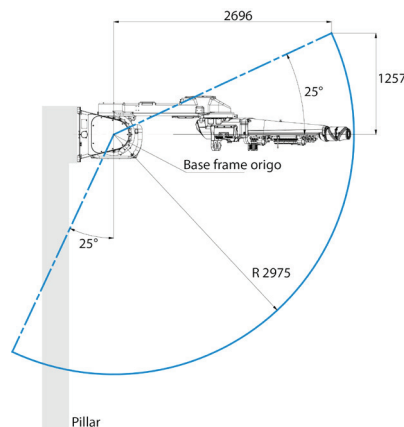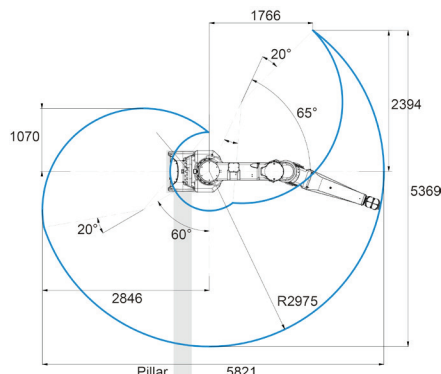

For more information please contact:

ABB Engineering (Shanghai) Ltd. Robotics

No. 4528 Kangxin Highway,
Pudong New District
201319, Shanghai, China
Phone: +86 21 6105 6666

www.abb.com/robotics

Please note:

We reserve the right to make technical changes to the product and to the information in this document without notice. The agreed conditions at the time of the order shall apply. ABB assumes no responsibility for any errors or omissions that may appear in this document. We reserve all rights in this document and in the information contained therein. Without prior written approval from ABB, reproduction, disclosure to third parties or use of any information, in whole or in part, is strictly forbidden.

Copyright© 2015 ABB, all rights reserved