


EB Series - Tubenut Lever

STANLEY


Tubenut Lever Tools (4.4 to 102 Nm)

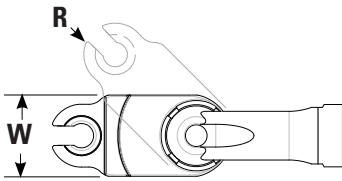

TUBENUT OUTPUTS CAN BE WELDED AT VARIOUS ANGLES.
INDEXABLE TUBENUT OUTPUTS ARE ALSO AVAILABLE
CONTACT STANLEY ASSEMBLY TECHNOLOGIES FOR MORE INFORMATION

EB22/EB33 Tubenut Tool Options 25Nm - 41Nm tools

Suspension Bails	Part No.
Optional Wire Bail	A3061
Swivel Bail	20K101400
Standard Wire Bail	B3432
See Page 176 for Tubenut Vinyl Cover Options	
See Page 151 for Tubenut Socket Selection	

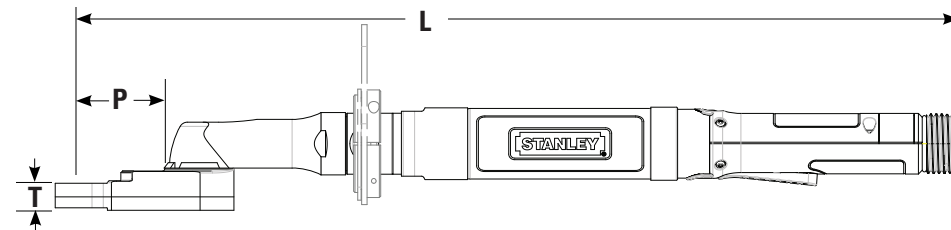

ANGLE	Rated Speed	Torque		“R” Nose Radius		“T” Thickness		“W” Width		“P” Length		“L” Length		Weight		Maximum Hex Size		Maximum Tube Size	
Model	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in	mm	in
EB22LT358-22	635	22	16.2	11	0.43	14	0.54	42	1.7	55	2.1	454	17.9	1.90	4.19	13	0.5	8	5/16
EB22LT252-25	500	25	18.4	13	0.52	14	0.54	42	1.7	56	2.2	434	17.1	1.79	3.93	13	0.5	8	5/16
EB33LT346-25	1165	25	18.4	13	0.52	14	0.54	42	1.7	34	1.3	511	20.1	2.34	5.15	13	0.5	8	5/16
EB33LT572-25	1165	25	18.4	13	0.52	14	0.54	42	1.7	34	1.3	518	20.4	2.34	5.15	13	0.5	8	5/16
EB33LT74-30	460	30	22.1	18	0.73	14	0.54	48	1.9	44	1.7	517	20.3	2.30	5.06	18	0.7	11	7/16
EB33LT375-41	710	41	30.2	13	0.52	22	0.85	44	1.7	59	2.3	466	8.3	2.48	5.45	13	0.5	8	5/16


INLINE	Rated Speed	Torque		“R” Nose Radius		“T” Thickness		“W” Width		“P” Length		“L” Length		Weight		Maximum Hex Size		Maximum Tube Size	
Model	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in	mm	in
EB22LT252-25	500	25	18.4	13	0.52	14	0.54	42	1.7	56	2.2	434	17.1	1.79	3.93	13	0.5	8	5/16
EB22LT571-25	500	25	18.4	13	0.52	14	0.54	42	1.7	56	2.2	434	17.1	1.79	3.93	13	0.5	8	5/16

VERTICAL	Rated Speed	Torque		“R” Nose Radius		“T” Thickness		“W” Width		“P” Length		“L” Length		Weight		Maximum Hex Size		Maximum Tube Size	
Model	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in	mm	in
EB34LT150-30	945	30	22.1	18	0.73	14	0.56	48	1.9	47	1.9	521	20.5	2.73	5.99	19	0.75	11	7/16

ANGLE	Rated Speed	Torque		“R” Nose Radius		“T” Thickness		“W” Width		“P” Length		“L” Length		Weight		Maximum Hex Size		Maximum Tube Size	
Model	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in	mm	in
EB34LT150-30	945	30	22.1	18	0.73	14	0.56	48	1.9	47	1.9	521	20.5	2.73	5.99	19	0.75	11	7/16
EB34LT23-41	695	41	30.2	18	0.73	23	0.91	48	1.9	44	1.7	575	22.6	3.07	6.75	18	0.71	11	7/16
EB34LT99-62	460	62	45.7	26	1.04	20	0.76	75	2.9	65	2.5	604	23.8	2.93	6.45	27	1.06	19	3/4
EB44LT20-102	430	102	75.2	26	1.04	32	1.24	75	2.9	65	2.5	628	24.7	4.46	9.82	27	1.06	19	3/4

These models are the more common of the standard 104 Tubenut outputs STANLEY Assembly Technologies has designed over the last 50 years. Contact STANLEY Assembly Technologies for the complete list or if you would like one designed for your specific application.

Mounting / Reaction Options

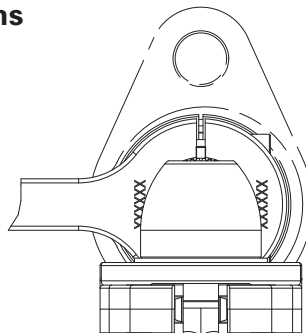

EB_4 Tubenut Tool Options 30Nm - 102Nm tools

Suspension Bails	Part No.
Wire Bail	A3061
Swivel Bail	20K200000
See Page 176 for Tubenut Vinyl Cover Options	
See Page 151 for Tubenut Socket Selection	