



# E Series Crowfoot Fixtured

## Angle Crowfoot Fixtured Tools (3.2 to 125 Nm)

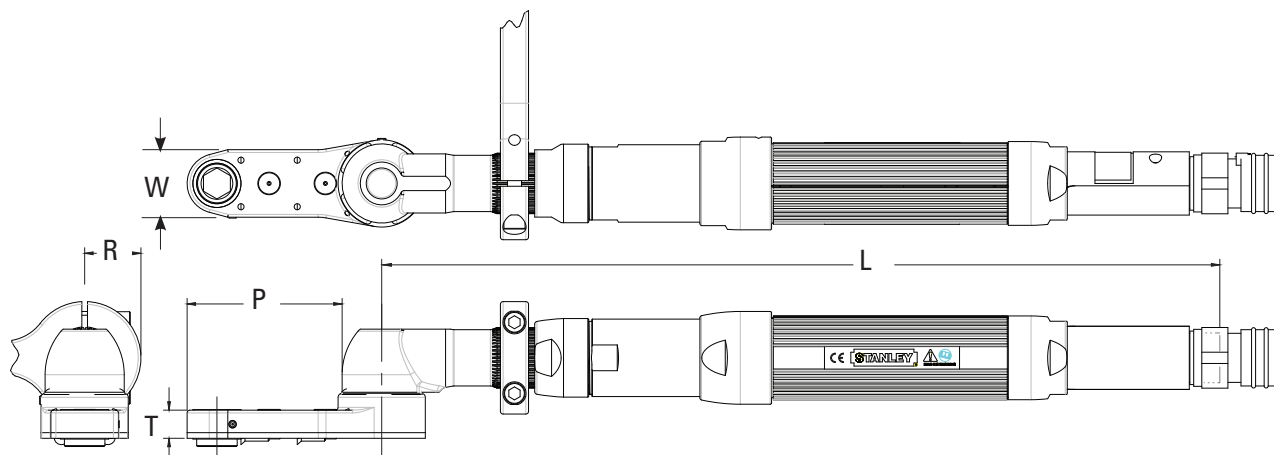

	Rated Speed	Torque		“R” Nose Radius		“T” Thickness		“W” Width		“P” Length		“L” Length		Weight		Maximum Hex Size	
Model	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in
E23MC8-16	660	16	11.8	13	0.50	16	0.64	25	1	45	1.76	393	15.5	2.4	5.3	13	1/2”
E34MC29-45	435	45	33.2	21	0.81	14	0.55	38	1.5	43	1.70	465	18.3	4.8	10.6	19	3/4”
E34MC203-49	490	49	36.1	21	0.81	17	0.66	38	1.5	71	2.78	573	22.6	4.8	10.6	19	3/4”
E34MC515-60	310	60	44.3	12	0.48	25	0.99	38	1.5	125	4.94	573	22.6	4.8	10.6	12	7/16”
E34MC226-73	330	73	53.8	17	0.66	17	0.66	38	1.5	68	2.69	473	18.6	4.8	10.6	16	5/8”
E45MC360-80	445	80	59	13	0.52	28	1.12	49	1.94	34	1.32	531	20.9	4.8	10.6	13	1/2”
E45MC365-80	445	80	59	13	0.52	28	1.12	38	1.5	97	3.82	531	20.9	4.8	10.6	13	1/2”
E44MC31-102	355	102	75.2	21	0.81	28	1.10	38	1.5	39	1.53	482	19	4.8	10.6	19	3/4”
E45MC573-125	265	125	92.2	20	0.81	20	0.80	73	2.89	18	0.71	611	24	4.8	10.6	18	11/16”

## Vertical Crowfoot Fixtured Tools (12.4 to 77 Nm)

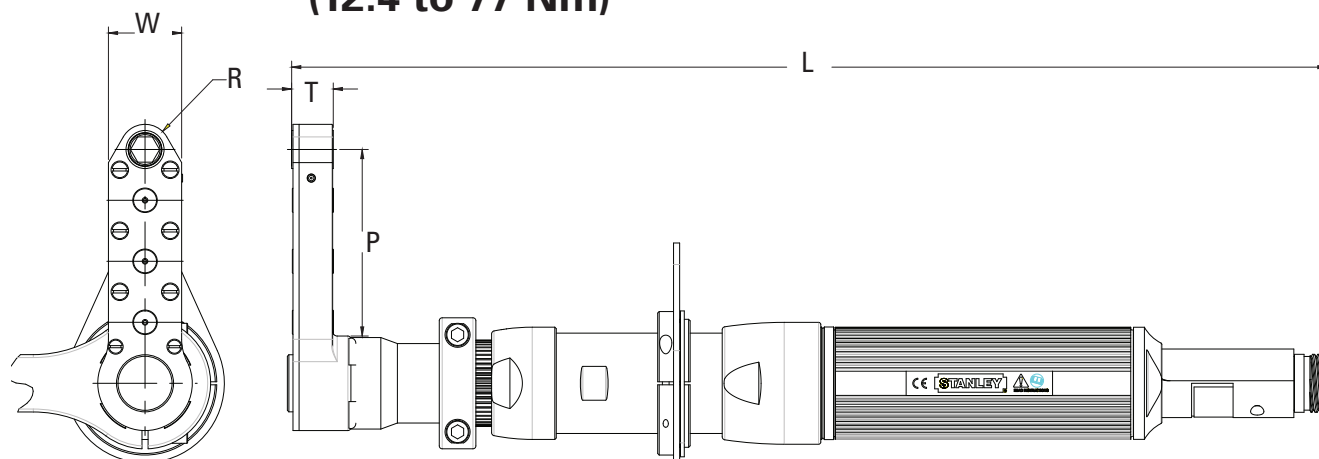

	Rated Speed	Torque		“R” Nose Radius		“T” Thickness		“W” Width		“P” Length		“L” Length		Weight		Maximum Hex Size	
Model	RPM	Nm	lb ft	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in
E45MC298-62	500	62	45.7	13	0.52	21	0.82	38	1.5	97	3.82	539	21.2	5.4	11.9	13	1/2”
E45MC225-77	515	77	56.8	29	1.16	31	1.22	59	2.31	58	2.27	534	21	5.4	11.9	27	1-1/8”

STANLEY Assembly Technologies has designed Tubenut and Crowfoot outputs for over 50 years. Contact STANLEY Assembly Technologies if you would like one designed for your specific application.