

Engineered Systems - Overhead Bridges


LBC Light Duty Overhead Bridge - For Clevis Arm Mount

Max Length: 244 cm (96 in)

LBC Light Duty Overhead Bridges interface STANLEY Articulating Arms to all common overhead rails. Bridge mast includes leveling jacks.

- All critical fasteners are either safety wired or pinned to ensure reliable operation
- Rugged and simple construction

NOTE: "Duty" level of Overhead Bridge must match "Duty" level of Articulating Arm.
(ie: Medium Duty Bridge for Medium Duty Arm.)

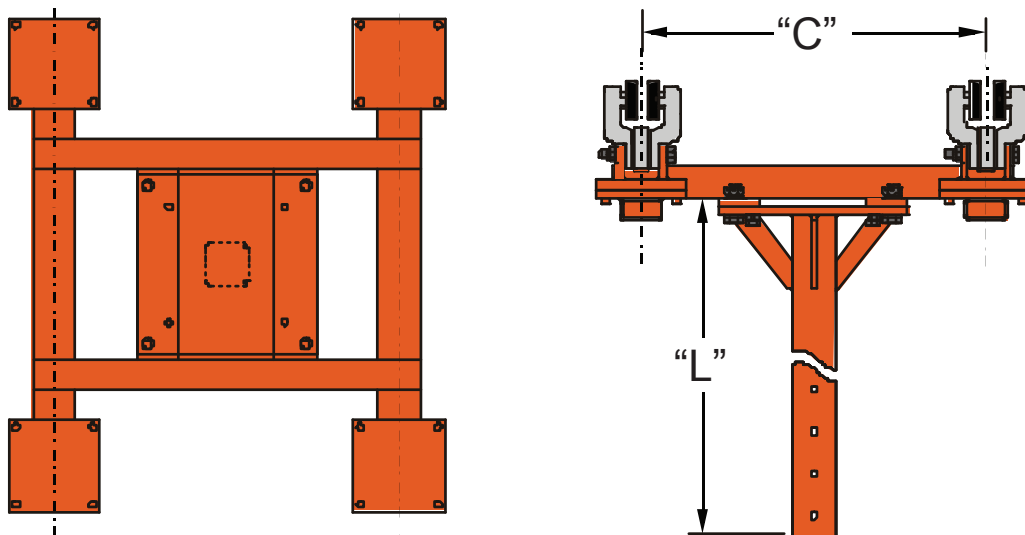

Model Number Build				
LBC	##	X		##

"C" Runway Rail Center Distance			Trolley Suspension			"L" Down Mast Length		
cm	in						cm	in
30.5	12	12		4" I-Beam Trolley	A		24	61
45.7	18	18		6" I-Beam Trolley	B		30	76.2
61	24	24		3.25" or 3.33" Flat Track Trolley	C		36	91.4
76.2	30	30		Unified ETA-4 Trolley	D		42	106.7
91.4	36	36		Unified ETA-8 Trolley	E		48	121.9
121.9	48	48		Demag KBKI Trolley	F		60	152.4
152.4	60	60		Demag KBKII-L Trolley	G		72	182.9
				IR/Zimmerman Trolley ZRA1	H		84	213.4
				IR/Zimmerman Trolley ZRA2	I		96	243.8

Other trolleys including anti-kick up available

Engineered Systems - Overhead Bridges

STANLEY®


MB Medium Duty Overhead Bridge - For Swivel or Clevis Arm Mount

Max Length: 244 cm (96 in)

MB Medium Duty Overhead Bridges interface STANLEY Articulating Arms to all common overhead rails. Bridge mast includes leveling jacks.





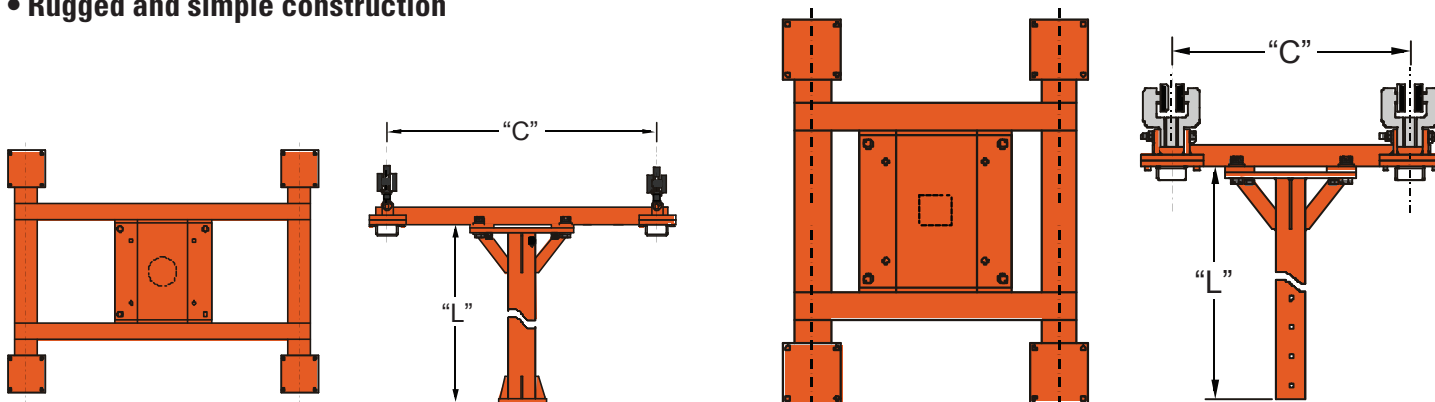

- All critical fasteners are either safety wired or pinned to ensure reliable operation
- Rugged and simple construction

NOTE: "Duty" level of Overhead Bridge must match "Duty" level of Articulating Arm.
(ie: Medium Duty Bridge for Medium Duty Arm.)



MBC Medium Duty Overhead Bridge with Clevis Mount

MBS Medium Duty Overhead Bridge with Swivel Mount

Model Number Build													
MB		C or S		##		X				##			
Mounting Type													
Clevis		C											
Swivel		S											
"C" Runway Rail Center Distance						Trolley Suspension		   		"L" Down Mast Length			
						4" I-Beam Trolley						A	
						6" I-Beam Trolley						B	
						3.25" or 3.33" Flat Track Trolley						C	
						Unified ETA-4 Trolley						D	
						Unified ETA-8 Trolley						E	
						Demag KBKI Trolley						F	
						Demag KBKII-L Trolley						G	
IR/Zimmerman Trolley ZRA1		H											
IR/Zimmerman Trolley ZRA2		I											
cm		in											
30.5		12		12						24			
45.7		18		18						30			
61		24		24						36			
76.2		30		30						42			
91.4		36		36						48			
121.9		48		48						60			
152.4		60		60						72			
										84			
										96			

Other trolleys including anti-kick up available

Other trolleys including anti-kick up available

Engineered Systems - Overhead Bridges



HBS Heavy Duty Overhead Bridge - For Swivel Arm Mount





Max Length: 244 cm (96 in)

HBS Heavy Duty Overhead Bridges interface STANLEY Articulating Arms to all common overhead rails. Bridge mast includes leveling jacks.

- All critical fasteners are either safety wired or pinned to ensure reliable operation
- Rugged and simple construction

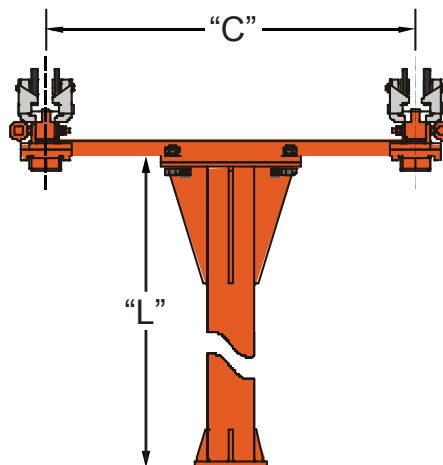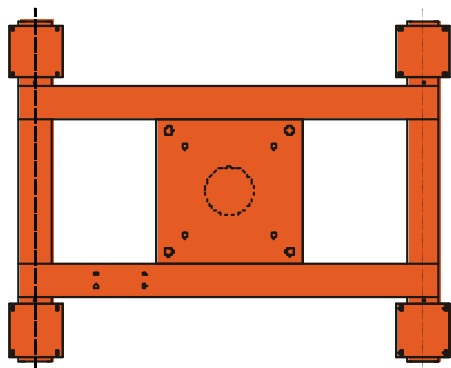NOTE: "Duty" level of Overhead Bridge must match "Duty" level of Articulating Arm.
(ie: Medium Duty Bridge for Medium Duty Arm.)



Model Number Build																				
HBS		##	X			##														
<div>"C" Runway Rail Center Distance</div> <table><tr><th>cm</th><th>in</th></tr><tr><td>45.7</td><td>18</td></tr><tr><td>61</td><td>24</td></tr><tr><td>76.2</td><td>30</td></tr><tr><td>91.4</td><td>36</td></tr><tr><td>121.9</td><td>48</td></tr><tr><td>152.4</td><td>60</td></tr></table>		cm	in	45.7	18	61	24	76.2	30	91.4	36	121.9	48	152.4	60	18		Trolley Suspension		
		cm	in																	
		45.7	18																	
		61	24																	
		76.2	30																	
		91.4	36																	
		121.9	48																	
152.4	60																			
4" I-Beam Trolley		A																		
6" I-Beam Trolley		B																		
3.25" or 3.33" Flat Track Trolley		C																		
	Unified ETA-8 Trolley		E																	
	Demag KBKII-L Trolley		G																	
	IR/Zimmerman Trolley ZRA1		H																	
			IR/Zimmerman Trolley ZRA2		I															
Other trolleys including anti-kick up available																				

"L" Down Mast Length		
	cm	in
12	30.5	12
18	45.7	18
24	61	24
30	76.2	30
36	91.4	36
42	106.7	42
48	121.9	48
60	152.4	60
72	182.9	72
84	213.4	84
96	243.8	96